


3 PHASE VOLT, AMPERE & FREQUENCY INDICATOR

- Features :
- » 3 Phase - 3 Wire
  - » 3 Phase - 4 Wire
  - » 1 Phase - 4 Wire configurable
  - » CT selection up to 2000 / 5

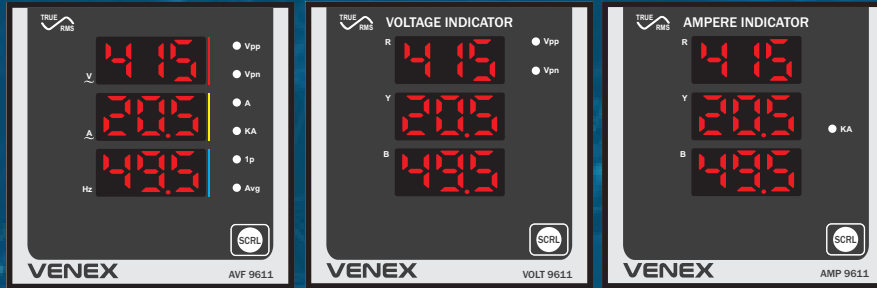

3 Phase Volt Indicator      3 Phase Amp. Indicator

| Model   | AVF 9611              | VOLT 9611             | AMP 9611              |
|---------|-----------------------|-----------------------|-----------------------|
| Frame   | 96X96                 | 96X96                 | 96X96                 |
| Panel   | 92X92                 | 92X92                 | 92X92                 |
| Display | 3+3+3 Digit 0.56" RED | 3+3+3 Digit 0.56" RED | 3+3+3 Digit 0.56" RED |

INPUT

Input      UP TO 2000/5 CT Selection

SPECIFICATIONS

|                       |  |
|-----------------------|--|
| Supply Voltage        | 230v AC, ±10%, 50Hz                                |
| Range                 | 0 - 2000 AMP AC 0 -650 Volt AC 0 - 999 (Frequency) |
| Accuracy              | Class 1.0  |
| Enclosure Material    | Polycarbonate + ABS Plastic                        |
| Operating Temperature | 0°C - 55°C   |
| Relative Humidity     | Upto 95% RH Non Condensing                         |