


STAR - DELTA PANEL WITH WATER LEVEL CONTROLLER

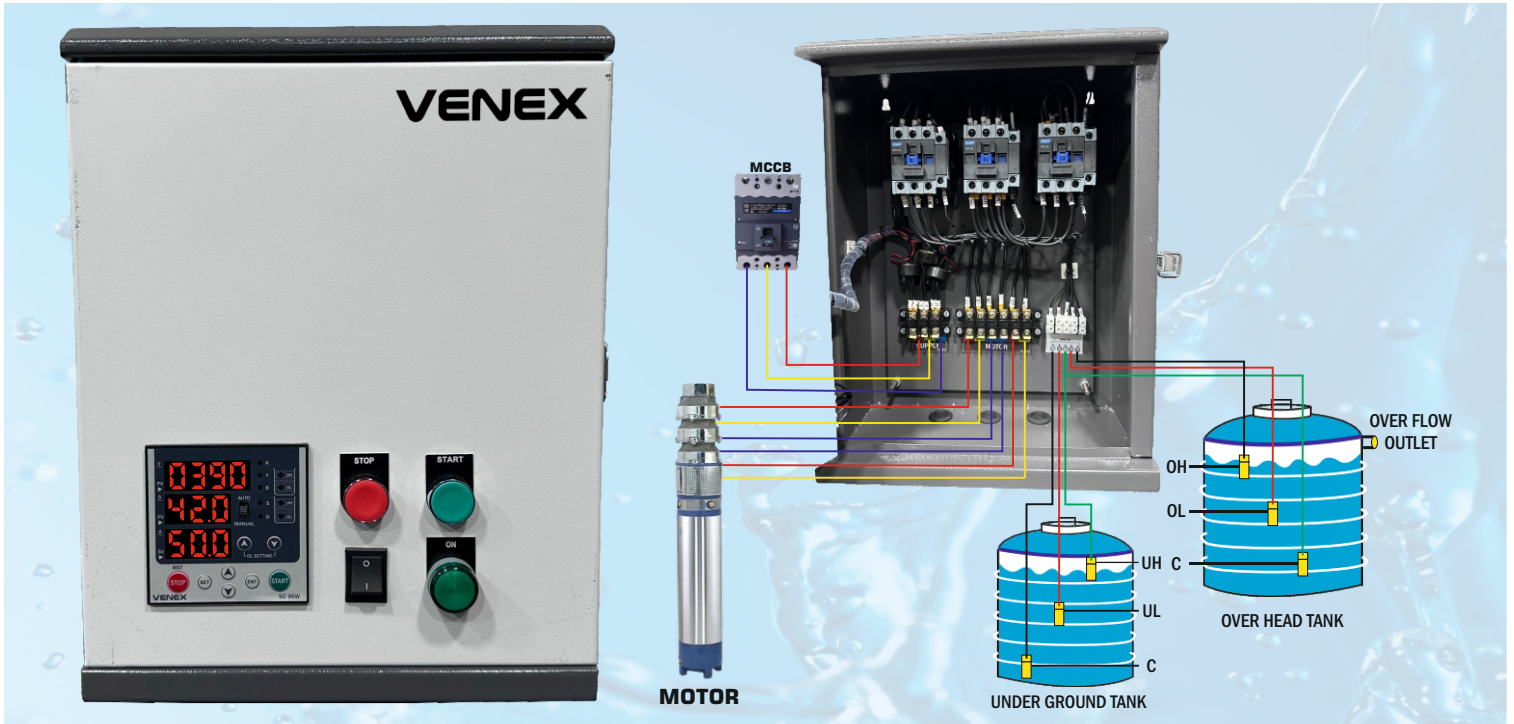

Ordering Information :

Model No.	Descriptions	Output type
SD 96W1209	Double Display, Suitable to 0.1 HP to 7.5 HP, Star Delta	Star Delta (12, 12, 09 AMP Contractor)
SD 96W 1812	Double Display, Suitable to 0.1 HP to 10.0 HP, Star Delta	Star Delta (18, 18, 12 AMP Contractor)
SD 96W 2518	Double Display, Suitable to 0.1 HP to 15.0 HP, Star Delta	Star Delta (25, 25, 18 AMP Contractor)
SD 96W 3225	Double Display, Suitable to 0.1 HP to 20.0 HP, Star Delta	Star Delta (32, 32, 25 AMP Contractor)
SD 96W 5040	Double Display, Suitable to 0.1 HP to 30.0 HP, Star Delta	Star Delta (50, 50, 40 AMP Contractor)
SD 96W 6550	Double Display, Suitable to 0.1 HP to 40.0 HP, Star Delta	Star Delta (65, 65, 50 AMP Contractor)
SD 96W 8065	Double Display, Suitable to 0.1 HP to 60.0 HP, Star Delta	Star Delta (80, 80, 65 AMP Contractor)
SD 96W 9580	Double Display, Suitable to 0.1 HP to 70.0 HP, Star Delta	Star Delta (95, 95, 80 AMP Contractor)

Input type	R, Y, B, Three Phase
Supply	450 VAC, 50 Hz (±10%)

- » Dual Tank Water Level Controller
- » Exclusively Designed to Operate Three Phase Star Delta Submersible Motor and Pump at Domestic Industrial and Agricultural
- » Built in Auto Switch
- » Micro Controller Baser Advance Phase Lose, Phase Sequence Over Voltage, Under Voltage, Over Load, Dry Run and Current Unbalance Protection
- » Delay OFF, Cyclic Timer
- » Fault Indication ON Display
- » It Protects Against Voltage Fluctuation Which Again Can Cause Damage to the Motor Or Pump
- » Auto and Manual Mode