

This section gives you all the information necessary to help you monitor and operate your controller including an Operator Interface overview, an explanation of the Displays, keys, LEDs, Mode access, and Operation Modes.



Model No. **LLC 35**


APPLICATIONS

- Perfect For Drain & Fill Control
- Water Distribution Pump Stations
- Submersible Pump Panels
- Soda Machines
- Textile Industry Setups
- Boiler Panels

High & Low-Level Indication LED for Lower & Upper Tank Pump Protection from Dry run & Overflow condition

Mechanical Dimensions

SPECIFICATION

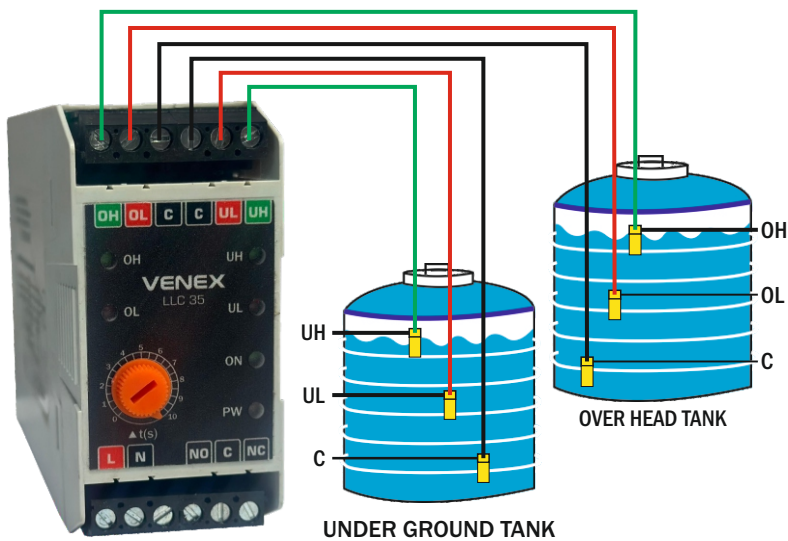

Supply	230 VAC, 50 Hz
Output	1 Relay 1 C/O, 5A,
Input	SS Type / Float Sensor
Delay Time	0-10 Sec.
Size	75 X 35 X 105 mm (H X W X D)

