



THREE PHASE DOL STARTER - M SERIES

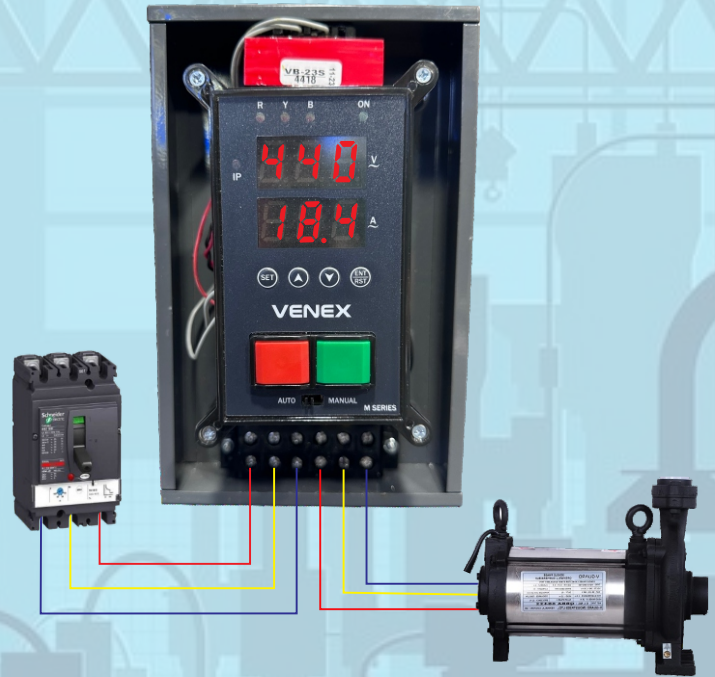

» Protect Motor From Phase Lose
» Easy Installation

Ordering Information :

Model No.	M - SERIES DOL
Load Capacity	0.5 HP to 5 HP
Input Supply	415 VAC, 50 Hz
Accurate Display For Ampere & Voltage Indication	

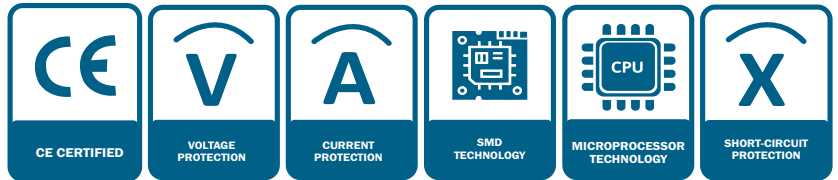

PROTECTION

» Over Load (Over Current)
» SPP

» Dry Run (Under Current)
» Phase Lose & Phase Sequence

» High & Low Voltage
» Short Circuit

FEATURES

Delay OFF & Cyclic Timer

Dry Reset Timer

Auto / Manual Mode

- » Metal Body (Corrosion Free Powder Coated)
- » Large Display
- » SS Terminal Screw
- » R, Y, B, LED Indication