


TEMPERATURE INDICATOR

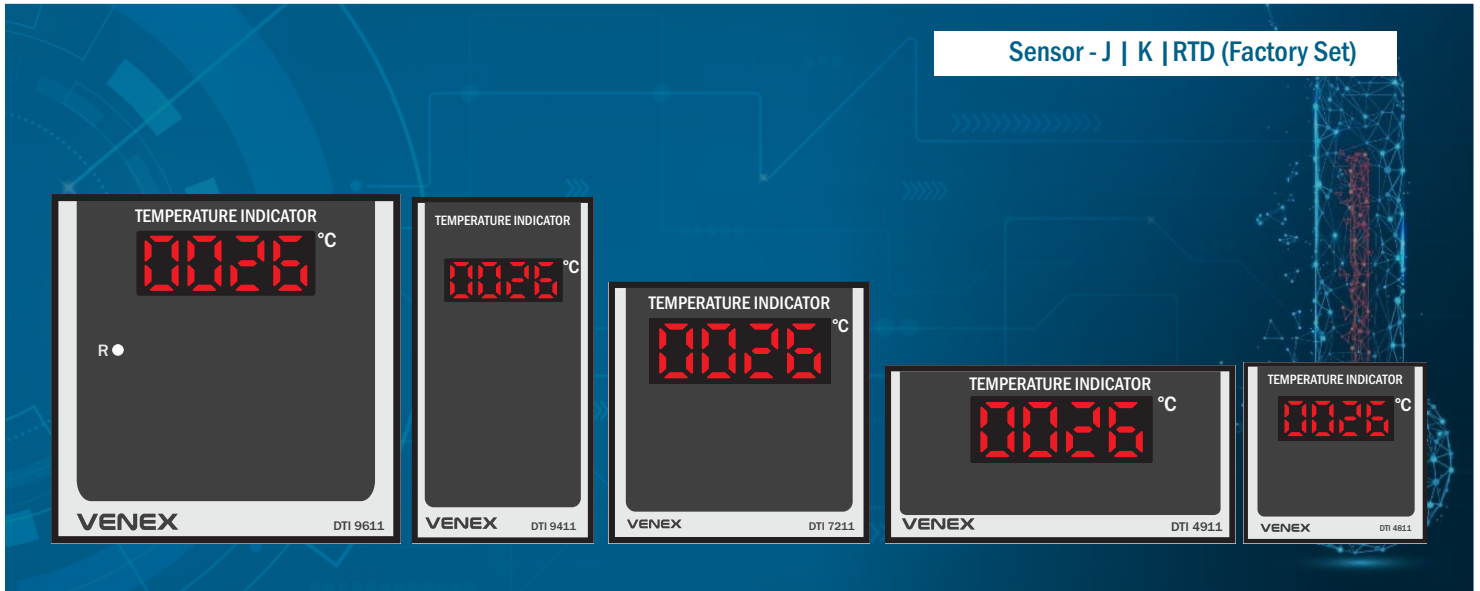

Model	DTI 9611	DTI 9411	DTI 7211	DTI 4911	DTI 4811
Frame	96X96	96X48	72X72	48X96	48X48
Panel	92X92	92X44	68X68	44X92	44X44
Display	4 Digit 0.56" RED	4 Digit 0.39" RED	4 Digit 0.56" RED	4 Digit 0.56" RED	4 Digit 0.39" RED

INPUT	Sensor	Range
	J & K OR RTD & RTD.1 2W/3W (Configurable)	(R/S/T/N/PT 1000)
		J(0°C to 400°C & 0°C to (600°C), K(0°C to 1200°C), PT-100 2W/3W(0°C to 400°C, - 50.0°C to 200.0°C)

SPECIFICATIONS	Supply Voltage	Accuracy	Enclosure Material	Operating Temperature	Relative Humidity
	230v AC, ±10%, 50Hz	±1% of FSD	Polycarbonate + ABS Plastic	0°C - 55°C	Upto 95% RH Non Condensing