


—○ AMPERE + PROCESS INDICATOR

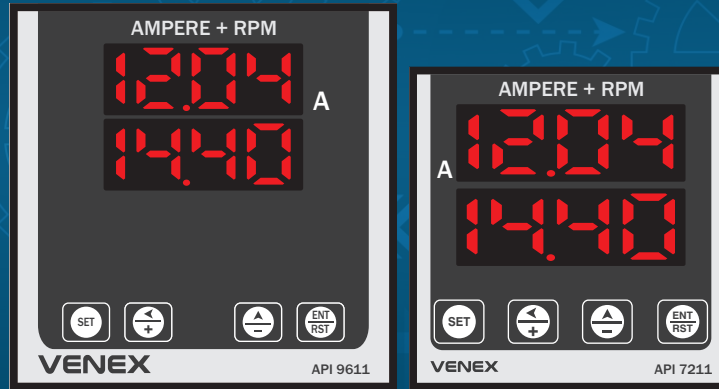

Model	API 9611	API 7211
Frame	96X96	72X72
Panel	92X92	68X68
Display	4 Digit 0.56" RED 4 Digit 0.56" RED	4 Digit 0.56" RED 4 Digit 0.56" RED

<p>INPUT</p> <p>Input (Amp.) Input Process Value Range</p>	<p>0 - 5 AMP AC Direct OR UP TO 2000 / 5 CT Selection 0 - 10 Volt DC , 4 - 20 MA , 0 - 20 MA (Factory Set) 0 - 2500 Count</p>
---	---

<p>SPECIFICATIONS</p> <p>Supply Voltage Accuracy Enclosure Material Operating Temperature Relative Humidity</p>	<p>230V AC, ±10%, 50Hz ±1% of FSD Polycarbonate + ABS Plastic 0°C - 55°C Upto 95% RH Non Condensing</p>
--	---

<p>Note</p>	<p>30 A AC / 50 A AC Direct CT Available</p>
-------------	--